

ARTICOLO / Item
Artículo / Article
/Artikel

09435

VARIANTI / Other versions
Otras opciones / Autres
options / Zusätzliche
Varianten


*Basetta di fissaggio su piano per gruppi di
prelavaggio e canne girevoli.*

*Deck mounted fixing base for pre-dishwashing
showers and swinging spouts*

*Bloque para fijación encimera de grupos de
prelavado y caños giratorios*

*Base de fixation sur plage pour combinés de
prélavage et becs mobiles*

*Befestigungssockel für Geschirrspülbrausen
und Schwenkausläufe*

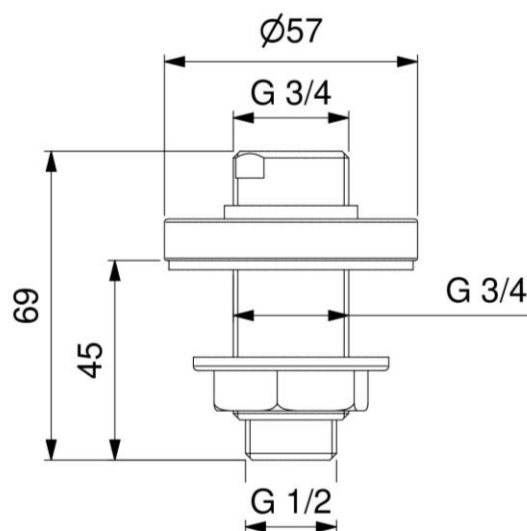

IT



COMPOSIZIONE

– Corpo in ottone cromato

CARATTERISTICHE FUNZIONALI

Pressione di alimentazione: Min 1 – max 6 bar

Pressione raccomandata: 2 – 4 bar

**Temperatura di
alimentazione:** 5 – 65 °C

EN



COMPOSITION

– Chromed brass body

OPERATING CHARACTERISTICS

Operating pressure: Min 1 – max 6 bar

Recommended pressure: 2 – 4 bar

Water inlet temperature: 5 – 65 °C

ES 

COMPOSICIÓN

– Cuerpo en latón cromado

CARACTERÍSTICAS FUNCIONALES

Presión de alimentación: Min 1 – max 6 bar

Presión recomendada: 2 – 4 bar

Temperatura de
alimentación: 5 – 65 °C

DE 

Lieferumfang

– Körper aus verchromten Messing

TECHNISCHE EIGENSCHAFTEN

Zulaufdruck:
Min 1 – max 6 bar

Empfohlener Zulaufdruck:
2 – 4 bar

Zulauftemperatur:
5 – 65 °C

FR 

COMPOSITION

– Corps en laiton chromé

CARACTÉRISTIQUES FONCTIONNELLES

Pression d'alimentation: Min 1 – max 6 bar

Pression recommandé: 2 – 4 bar

Température
d'alimentation: 5 – 65 °C